

## ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

TOOLS: YOU WILL NEED THE FOLLOWING TOOLS OR EQUIPMENT: LADDER, SCREWDRIVER, ADJUSTABLE WRENCH, WIRE CUTTERS.

UNPACK THE FIXTURE :

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS IN THE PACKAGE: CANOPY AND FIXTURE BODY. TO PROTECT THE FINISH, PLACE ALL PARTS ON A SOFT SURFACE.

MOUNTING HARDWARE PACKAGE:

CROSSBAR, NIPPLE WITH SET SCREW, METAL RING, (2) 8-32 × 1-1/4" SCREWS AND (3) WIRE CONNECTORS.

FIXTURE ASSEMBLY:

1. LOOSE THE SET SCREW ON BOTTOM OF NIPPLE AND ADJUST THE CORD LENGTH, THEN SECURE THE CORD TO BOTTOM OF THE NIPPLE BY TIGHTENING THE SET SCREW.


2. CUT OFF THE CORD TO KEEP THE CORD 12" LONGER THAN THE LENGTH THAT YOU WANT.

3. SPLIT THE END OF THE POWER SUPPLY WIRE 3-1/2" FROM THE END AND STRIP THE PLASTIC COVER OFF THE WIRE ABOUT 1/2".

4. INSTALL A 100 WATT MAX. MEDIUM BASE TYPE "A" BULB (NOT INCLUDED) INTO SOCKET.

COMPLETE INSTALLATION INSTRUCTIONS ON NEXT PAGE.



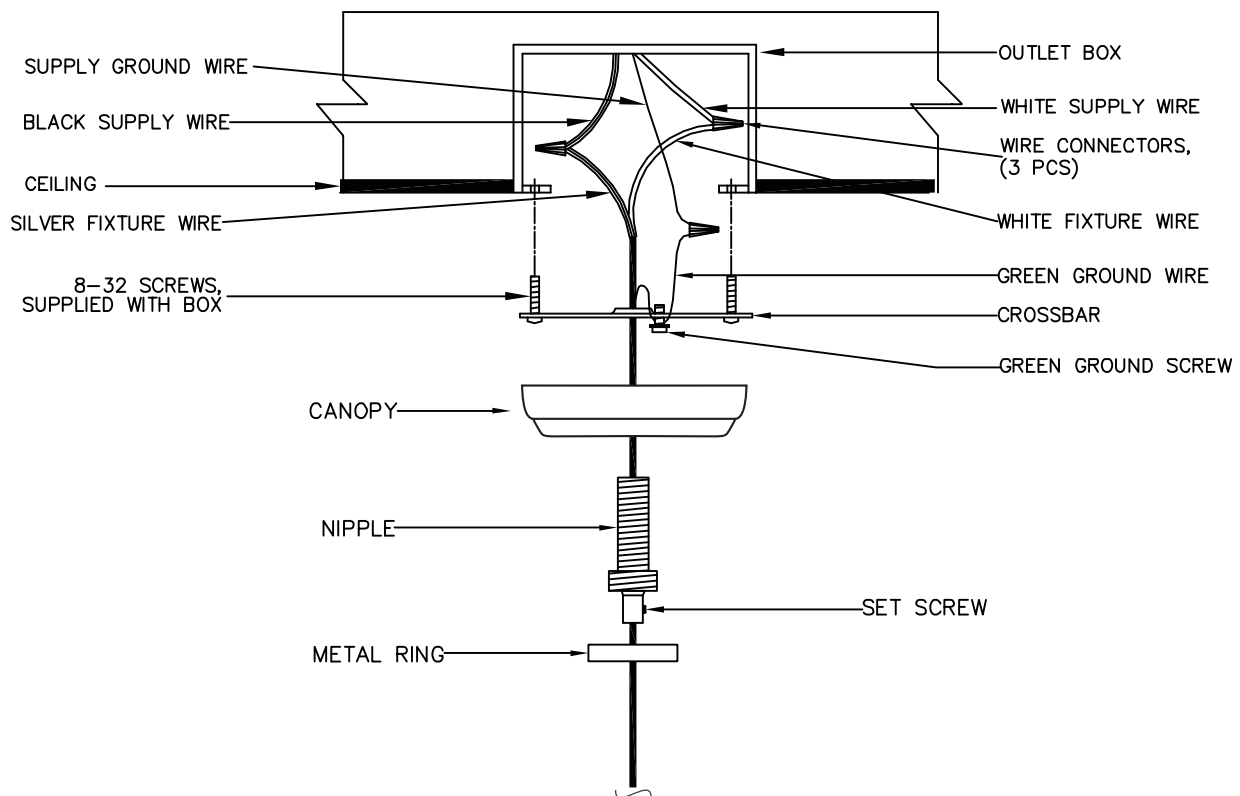

## INSTALLATION INSTRUCTIONS

### READ AND SAVE THESE INSTRUCTIONS

**CAUTION:** TO AVOID POSSIBLE ELECTRIC SHOCK, MAKE SURE THE ELECTRICITY IS SHUT OFF AT THE MAIN PANEL. IF YOU ARE REPLACING AN EXISTING FIXTURE, FIRSTLY, TURN THE FIXTURE OFF. NEXT, TURN THE WALL SWITCH OFF. FINALLY, GO TO THE MAIN FUSE OR BREAKER BOX IN YOUR HOME. TURN THE FUSE OR BREAKER TO THE OFF POSITION. SOME TYPES OF FUSES MUST BE UNSCREWED TO SHUT OFF THE POWER.

\* ALL WIRING MUST BE DONE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRIC CODES.

\*\* IF YOU ARE NOT FAMILIAR WITH WIRING, YOU SHOULD USE A QUALIFIED ELECTRICIAN.

\*\*\* THIS FIXTURE IS INTENDED TO BE MOUNTED TO A UL LISTED OUTLET BOX CAPABLE OF SUPPORTING THE FIXTURE.

#### COMPLETE FIXTURE ASSEMBLY INSTRUCTIONS FIRST (SEE PREVIOUS)

1. ATTACHED THE CROSSBAR TO THE CEILING OUTLET BOX USING THE TWO SCREWS PROVIDED WITH THE OUTLET BOX. (NOTE: IF THE SCREWS WITH THE OUTLET BOX ARE TOO SHORT, USE THE (2) 8-32 × 1-1 SCREWS PROVIDED IN THE MOUNTING HARDWARE PACKAGE).

2. SLIDE THE METAL RING AND THEN THE CANOPY OVER THE CORD.

3. SCREW THE NIPPLE TO THE CROSSBAR.

4. CONNECT THE WHITE FIXTURE WIRE TO THE WHITE SUPPLY WIRE IN THE OUTLET BOX USING THE TWIST-ON WIRE CONNECTORS PROVIDED. CONNECT THE BLACK FIXTURE WIRE TO THE BLACK SUPPLY WIRE IN THE SAME MANNER. INSTALL THE GREEN GROUND WIRE UNDER THE GREEN GROUND SCREW ON THE CROSSBAR THEN CONNECT THE GREEN GROUND WIRE TO THE SUPPLY GROUND WIRE IN THE OUTLET BOX USING THE TWIST-ON THE OTHER SIDE.


6. RAISE THE CANOPY WITH FIXTURE BODY TO THE CEILING AND SECURE IN PLACE WITH METAL RING.

7. RESTORE POWER, YOUR FIXTURE IS NOW READY FOR USE.



MODEL NO. 93442DGZ

PACKING DIAGRAM

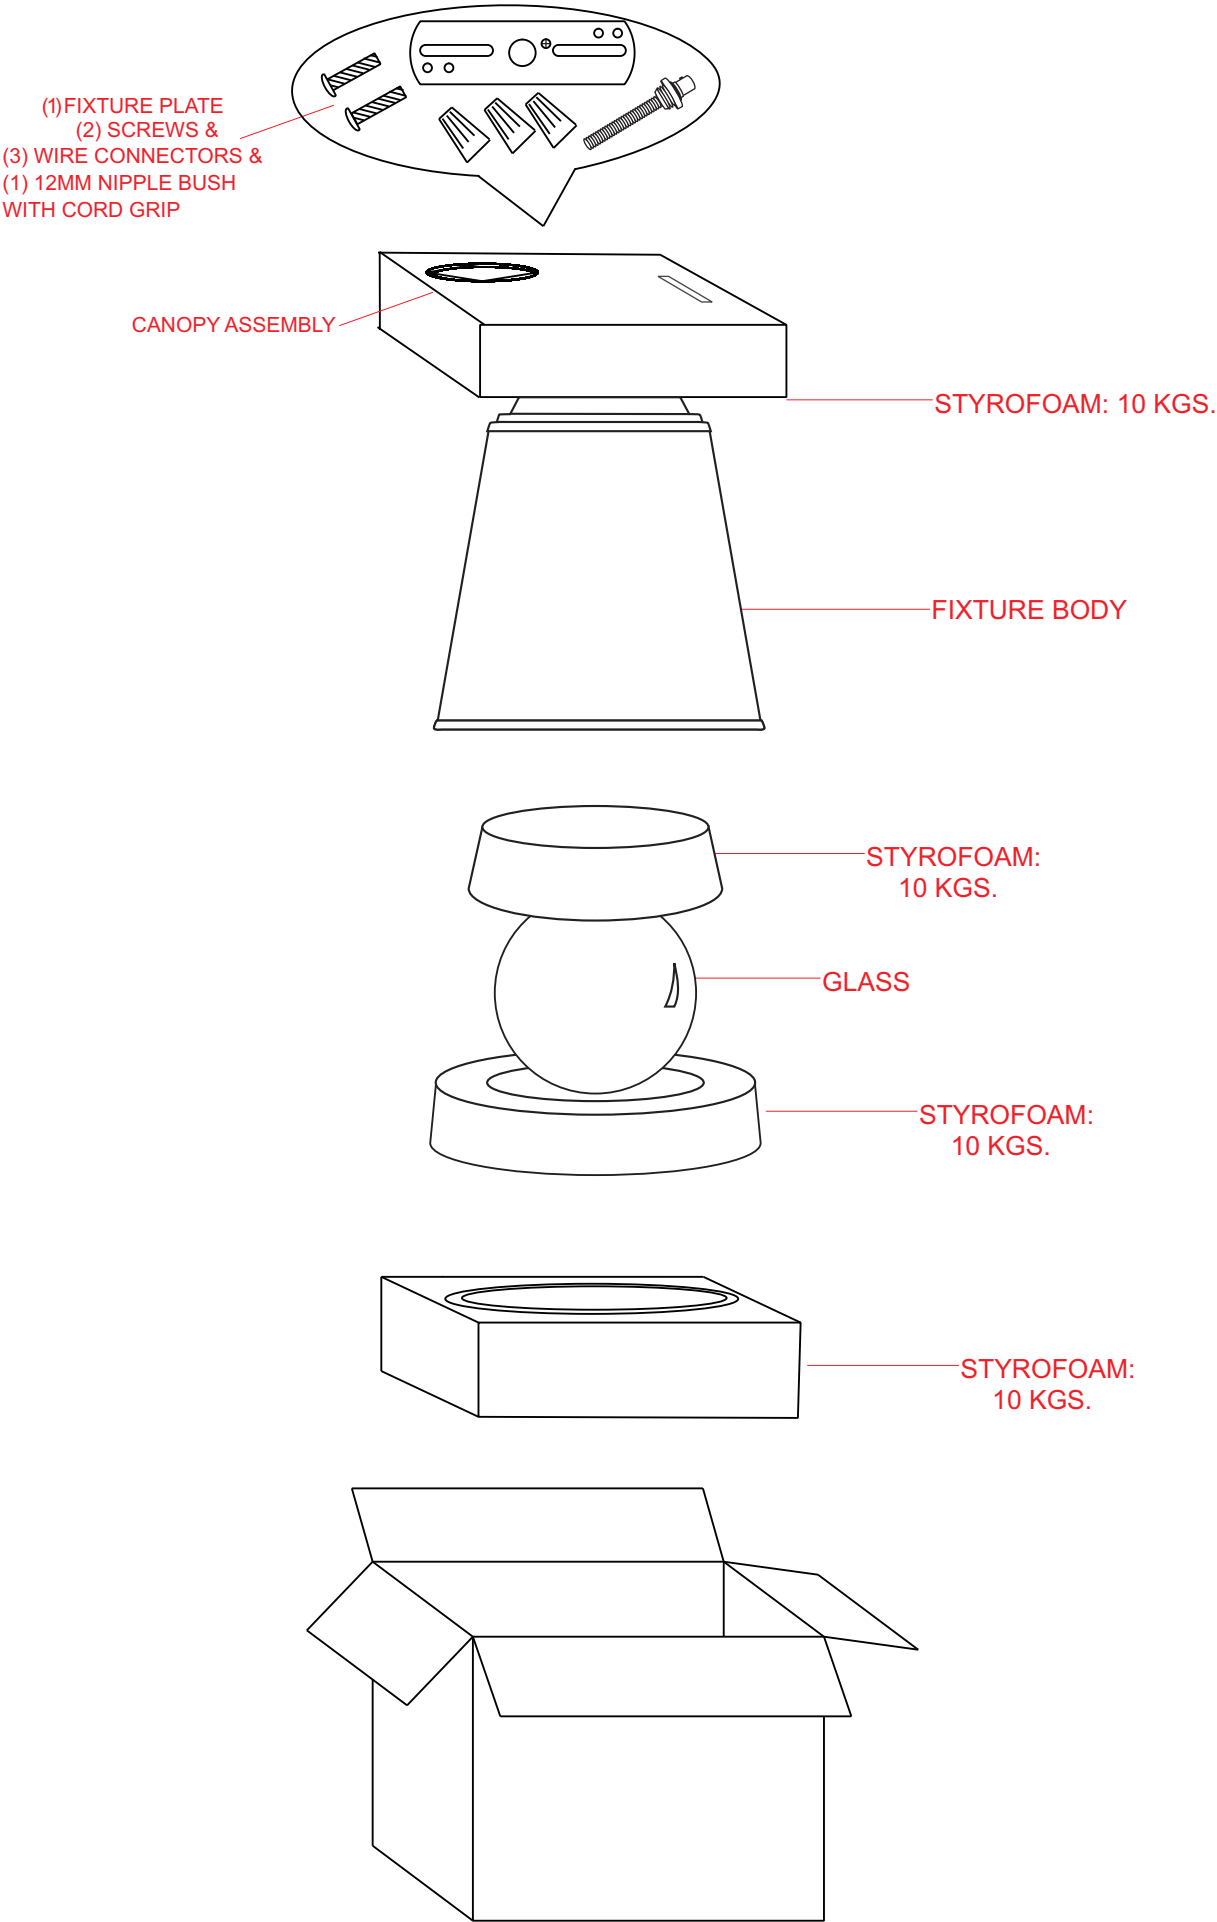

## PRODUCT SPECIFICATIONS

### ☐ OVERALL ASSEMBLED DIMENSIONS

HEIGHT: 43.18 CM (17"), WIDTH: 40.60 CM (16") DIA.

☐ 1 LIGHT: UL LISTED, 100 WATT, MEDIUM BASE E-26 CERAMIC SOCKET WITH STEEL COVER.

☐ CANOPY: PAINTED STEEL, 14 CM (5-1/2") DIA. x 3 CM (1 1/2") HEIGHT.

☐ CORD: UL LISTED, 305 CM (10 FT.) LENGTH, 18 AWG., 3 CONDUCTORS, TYPE SVT CORD, 105°C, BLACK COLOR, WIRES MUST BE LEAD FREE.

☐ METAL SHADE: STEEL, OUTSIDE: DARK GREY ZINC, INSIDE: DARK GREY ZINC HEIGHT: 43.18 CM (17"), WIDTH: 40.60 CM (16") DIA. SHAPED AS SHOWN.

☐ GLASS: LIGHT CREAM GLASS  
DIA. 24.77 CM (9 3/4"), SHAPED AS SHOWN.

☐ LABELS: UL, CSA OR CUL, MANUFACTURING DATE, MODEL # AND COUNTRY OF ORIGIN LABELS PROVIDED IN CANOPY. RELAMPING LABEL FOR 100 WATT MAX. TYPE "A" BULB PROVIDED ON SOCKET.

### ☐ PACKAGING AND SHIPPING DETAILS

☐ THE LAMP IS ASSEMBLED FOR SHIPPING. THE WHOLE LAMP IS CAREFULLY WRAPPED IN A PLASTIC BAG AND PLACED SECURELY IN THE INNER PACKING SO IT CAN NOT MOVE AROUND DURING SHIPPING. A SMALL BAG OF SILICA IS INCLUDED IN THE PACKAGE.

☐ HARDWARE PACK #005 PROVIDED. ALL PARTS SHOULD BE SECURED SO THEY CAN NOT MOVE DURING SHIPPING.

☐ THE CARTON IS MADE OF DOUBLE WALL, CORRUGATED CARDBOARD "A MA A". BROWN IN COLOR. THE INNER PACKING IS DIE-CUT CARDBOARD OR STYROFOAM TO PROTECT AND SECURE THE LAMP AND MUST PASS THE FEDEX AND ISTA-3A DROP TEST REQUIREMENTS.

☐ EACH CARTON SHALL BE PRINTED WITH A LINE DRAWING AND THE KENROY HOME NAME AND LOGO, MODEL NUMBER AND FINISH, EACH CARTON SHALL BE PROVIDED A UPC LABEL. THE UPC BAR CODE AS FOLLOWS: DGZ = 053392064860

### ☐ OTHER DETAILS

☐ MODEL 93442DGZ INSTRUCTIONS ARE TO BE PACKED WITH EACH LAMP.


☐ INSTRUCTIONS MUST BE PRINTED CLEARLY ON QUALITY PAPER.

☐ ALL BAGS MUST BE LABELED WITH OFFICIAL "THIS BAG IS NOT A TOY" STATEMENT.

☐ THE UL NUMBER IS E467066.

☐ DIMS OF BOX: 45.72CM (18") LENGTH x 45.72CM (18") WIDTH x 54CM (21.25 ") HEIGHT.

☐ NET WEIGHT: 7.10 LBS. GROSS WEIGHT: 14.00 LBS.

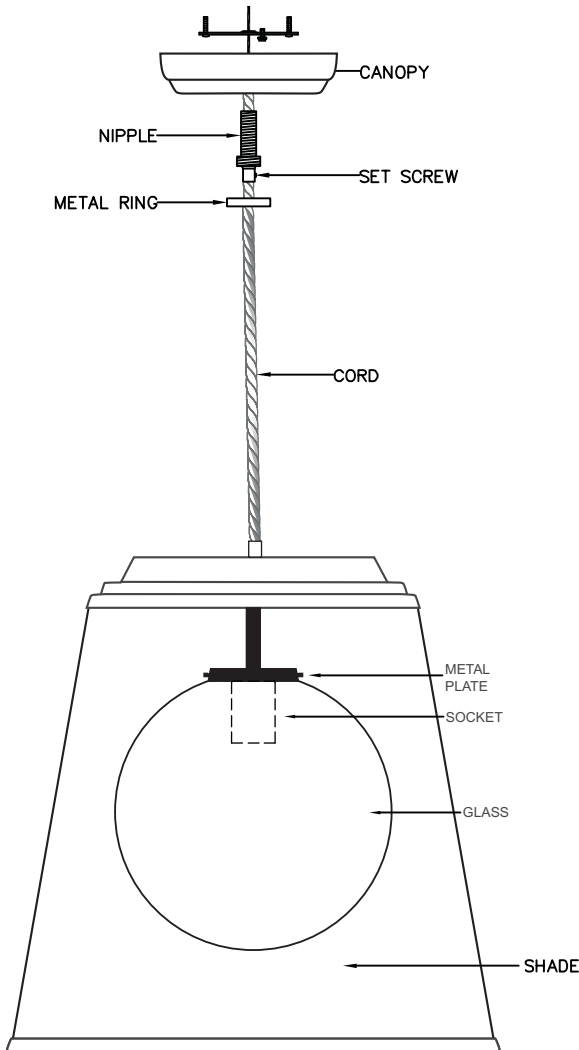

**KENROY  
HOME**

3723 Regent Boulevard  
JACKSONVILLE, FL. 32224  
PHONE: 904-642-4340  
FAX: 904-642-4150

THIS DOCUMENT AND THE INFORMATION THAT IT DISCLOSES IS THE EXCLUSIVE PROPERTY OF KENROY HOME. ANY REPRODUCTION OR USE OF THIS DRAWING IN PART OR IN WHOLE, WITHOUT THE EXPRESS CONSENT OF THE PROPRIETOR IS PROHIBITED. © 2013 KENROY HOME.

DATE: 9/2/2014

SCALE: NONE

DRAWN BY: JAMES

REFERENCE:

1 LIGHT PENDANT

APPROVAL:

REVISION DATE:

REVISION DATE:

REVISION DATE:

REVISION DATE:

MODEL #:

**93442DGZ**

FINISHES:

**Dark Grey Zinc**

PAGE: 1 OF: 1